

The **NOMAD POWER 400** is a lithium-based power pack that combines 3 functions :

- **Booster for 12 V vehicles (motorbike, quad, car, SUV).**
- **Autonomous power supply for all kinds of electrical appliances.**
- **Emergency lamp.**

## LITHIUM BATTERY BOOSTER

Its **lithium** battery (LiCoO<sub>2</sub>) gives it an exceptional power-to-size ratio (starting current: 500 A).

It starts vehicles equipped with a discharged 12 V battery (liquid, gel, AGM, Start&Stop) in a few seconds ( ⚠ do not start Lithium LiFePO<sub>4</sub> batteries with this booster, battery voltages not compatible).



## SAFETY START

The **smart jump lead** protects both the battery and the vehicle's electronics:

- Anti-spark technology,
- Short circuit protection,
- Reverse polarity protection,
- Protection against excessive starting currents,
- Protection against booster temperature increases.

## MOBILE ENERGY SOURCE

Its storage capacity (3 Ah) gives it sufficient autonomy to meet the daily needs of staying connected (telephone, tablet, computer).

Equipped with:

- **2 USB ports** : 5 V / 9 V / 12 V - 2 A / 5 V - 2 A for recharging smartphone, tablet, GPS, etc.
- **1 output port 15 V - 5 A** ideal for powering a 12 V electrical appliance (cool box, fan, etc.)

## HIGH BRIGHTNESS ASSIST LAMP

Auxiliary light (1 led) with 3 lighting modes: normal, strobe, SOS.

## LCD DISPLAY

The NOMAD POWER 400 is equipped with an LCD display that gives information on:


- the % of charge of the internal battery.
- the different input and output ports used.

## A SMART PRODUCT

**Lightweight (498 g) and compact**, it will ideally find its place in a vehicle's glove box/tray as well as in a suitcase.



Colour LCD display

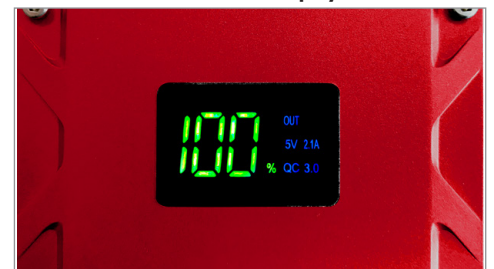

Supplied with case + accessories



Smart jump lead



Multiconnectors USB cable



Cigarette lighter adapter + charging cable

STARTING						EQUIPMENT						INPUT / OUTPUT				POWER BANK	LED	DIMENSIONS		
Lithium		I				J3s	SMART CABLE	🔌	🔌	CABLES			INPUT	OUTPUT			📱📺	☀️	↕️ cm	👤 kg
Capacity per cell	Full charge	Start	Cranking CC	Peak Battery	USB-C					MICRO USB Type B	Lightning	12V		15V	5V					
3 Ah 45 Wh	5 h	500 A	1000 A	1200 A	11000 J	✓	—	✓	✓	✓	✓	5V-2A	2   5V-2A 5/9/12V-2A	—	5A	✓	3 modes : Light SOS SPOT	17.5 x 8.4 x 3.1	0.498	