40⊳140A

SMARTMIG 152

Ref. 032859



Single -phase welding machine - 140A. Portable and ideal for maintenance. Easy to use and intuitive with the "SMART" solution.



Perfectly suited to repair work on steel, stainless steel and aluminium.



Portable, weighs only 23 kg.



Low current consumption, suitable for use on a domestic 13 Amp power supply.



Takes both **1kg** (100mm) and **5kg** (200mm) wire reels.



MIG/MAG for indoor welding Ø wire 0,6 – 0,8 mm



NO GAS for outdoor welding Ø wire fil 0,9 mm kit no gas (041240)




Constant running fan protects unit against overheating.



Earth Clamp and 2 m EURO torch included.

Quick and easy set-up

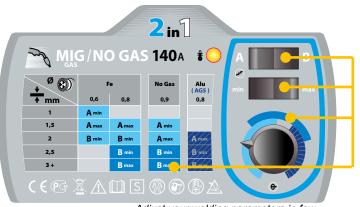

Adjust your welding parameters in few seconds with the intuitive settings.

With the Smartmig, no complicated adjustment.

Thanks to the SMART board, it is easy to adjust the voltage (4 positions) and the wire feeding speed.

Ideal setting indicated, just select:

- Type and diameter of the wire
- Thickness of the metal sheet

| - | - AM - | | ⊕ ‡ ømm | | ⊕ ‡ _{ømm} | | | | équipement d'origine / original equipement / Originalausstattung / equipamiento de fabrica | | EN60974-1 (40°C) | | Uo | \$_\^_ | € | |
|---------|--------------------|---------|----------------|-----------|---------------------------|-----|-----|-----------------------|---|-----|---------------------|----------------|-------|--------------------|--|--|
| 50/60hz | [AIII] | min⊳max | GAS | NO GAS | 100 | 200 | 300 | Electronic Control | | ~ | IA (60%) | X% (I2 max) | 00 | cm/kg | Protected & compatible POWER GENERATOR (+/- 15%) | |
| 230V 1~ | 13A | 40-140A | 0.6 0.8 | 0.9 | ✓ | ✓ | | <u>⊙</u> | 0.6/0.8 | 0.8 | 60A | 90A 20% | 28>39 | 48x45x25.5 / 23 | 3.5 kVA | |