


Cooling unit for TIG AC/DC.

Quickly and easily turns your device into a liquid-cooled TIG.

The cooling unit is easily attached to the base of the welding generator.

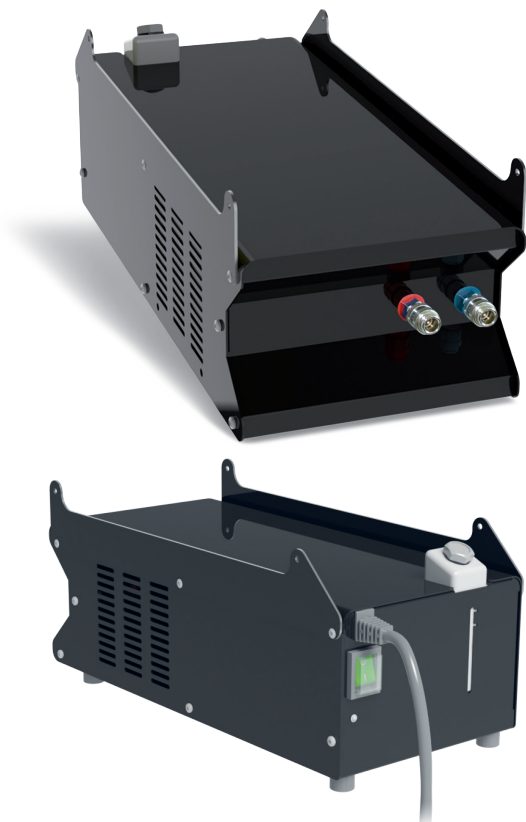

✓ Simple to use, the unit takes **all types of liquid automotive coolants**.

✓ With **standard connections** (G1/8 Male) the cooling unit will accept most TIG torches on the market.

✓ The unit's **security valves** will prevent fluid-flow when disconnecting the torch.

✓ It's **independent power supply** means that the cooling unit can be turned off when using an air cooled torch.

Compatible with TIG welding machines :

- 200A maximum
- Max. Dimensions width 200mm x length 380mm

SPECIFICATIONS

Power Supply	230V – 10A – 50/60Hz
Capacity	1,5 L
Max. Pressure	0,6 Mpa
Cooling Capacity 1L/min	400 W
Dimensions (mm)	420 x 199 x 178
Weight (empty reservoir)	8,2 kg

